


WAVEFORMS




OUTPUT CABLE

FUNCTION	WIRE COLOR	PIN #
HTR	BLK	1
HTR	BRN	2
G1 RED	GRY	3
G1 GRN	TAN	4
G1 BLU	PUR	5
K RED	RED	6
K GRN	GRN	7
K BLU	BLU	8
G2 RED	ORG	9
G2 GRN	YEL	10
G2 BLU	PINK	11
G3 / G4	WHT	12

CIRCUIT SYMBOL LEGEND

LAST NUMBER USED	NOT USED
C 22	4
D 38	16
I 2	
I C 2	
M 3	
N 8	
Q 10	
R 72	
S 11	
F 2	
T 2	

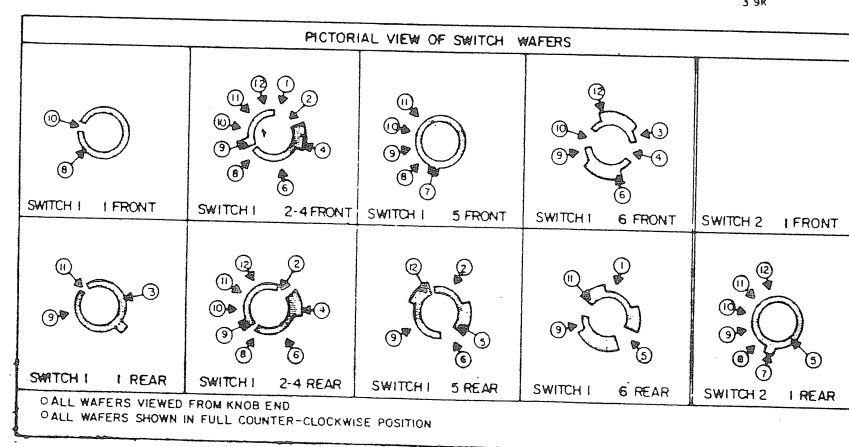

POSITION	FUNCTION
1	POWER OFF
2	SET UP
3	SET CUTOFF
4	TEST
5	RESTORE

NOTE:

- 1 ALL RESISTORS ARE 5%, 1/4W, UNLESS OTHERWISE SPECIFIED.
- 2 ALL 1% RESISTORS ARE 1/2W, UNLESS OTHERWISE SPECIFIED.
- 3 ALL CAPACITORS SHOWN IN MICROFARADS.
- 4 ARROWS ON POT WIPERS INDICATE CLOCKWISE ROTATION.

- 5 THIS SCHEMATIC SUBJECT TO CHANGE WITHOUT NOTICE.
6 Δ AND ∇ INDICATE LOGIC SYMBOLS
7 \downarrow CIRCUIT GND \rightarrow CHASSIS
(\uparrow VARIES WITH CONTROL SETTINGS)

Fig. 3. Model 467 Schematic.